




RAINER 1200 AUTO

Submersible pump designed for pumping clean and slightly polluted water, not containing abrasive elements (e.g. sand), as well as water containing chlorine. These pumps are mainly used to supply water to households, irrigation systems, and rainwater collection systems. They can also be used to pump clean water from flooded rooms. RAINER 1200 AUTO pumps are equipped with an automatic pump control system instead of a float switch.

Characteristics:

- The design uses a cooling jacket, so the pumps do not have to be fully submerged
- Dry running protection
- Automatic air venting, the pump is equipped with a bleeding valve
- Electronic machine controlling the pump operation. When the outlet valve is closed, the pump turns off and goes into standby. The pump will automatically turn on when the outlet valve opens
- If the motor is overloaded, the thermal protection built into the motor will turn off the pump
- Leakage protection (leakage in the pressure hose or tap)
- Warranty and post-warranty service
- 24-month warranty

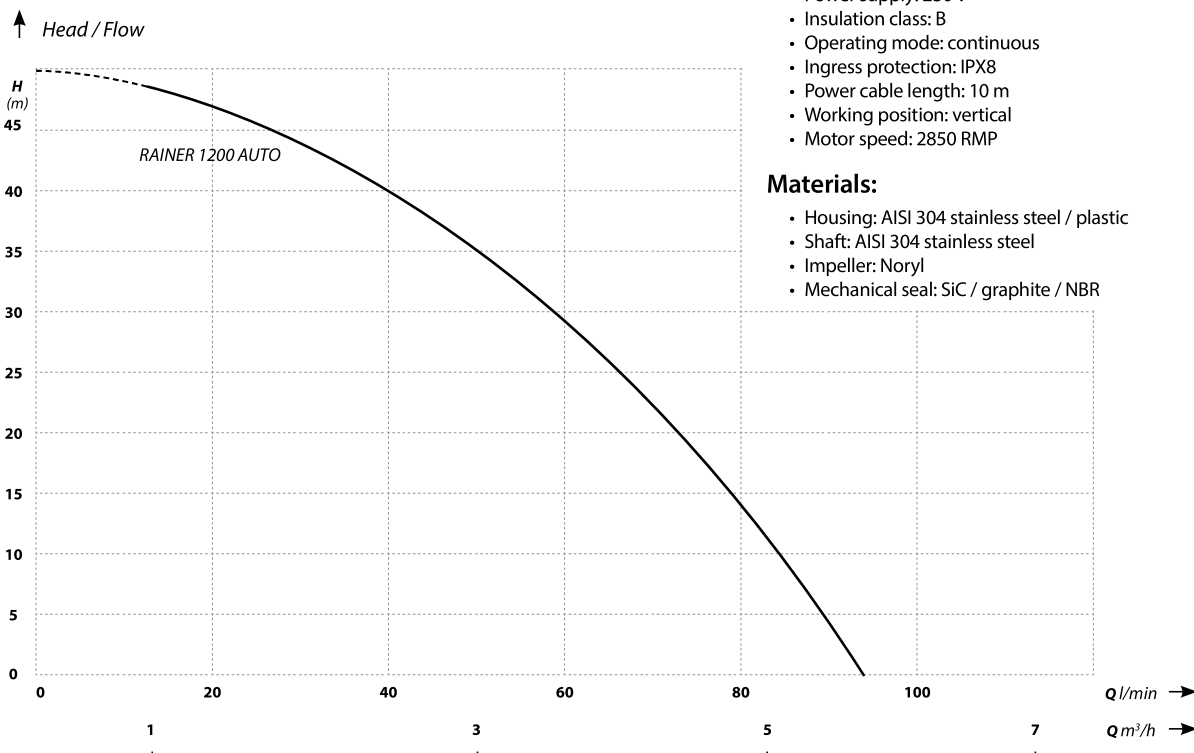

Model	Head (m)	Flow (l/min)	Motor power (W)	Power supply (V)	Current consumption (A)	Passage through the impeller (mm)	Connections (inch)	Dimensions diameter/height (cm)	Weight (kg)
RAINER 1200 AUTO	50	95	1200	230	5,2	1	1 / 1½	17 / 53	8,7